


Small Rosette FPB-301 Series



FPC-301-4SC

Structure (schematic)

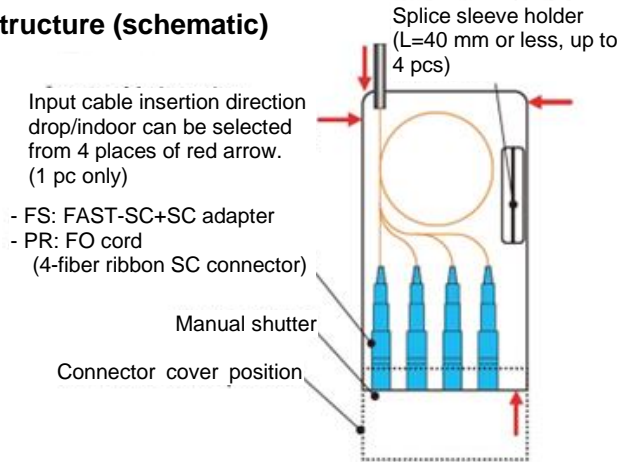

Features


- UV resistant
- Suitable for termination of FTTH condominiums and of LAN (FTTD).
- Built in FO(-PR) and field-assembled connector (FAST-SC) (-FS) available
- Indoor cable and drop cable can be installed. Use the fibers having R15 mm bending diameter such as “SR15” and “SR15E”.

Physical & Mechanical Characteristics

		FPB-301-2SC-FS	FPB-301-4SC-FS	FPB-301-4SC-PR (*1)
Cable Installation Direction		Top, bottom, left or right		
Connector Type		SC (*2)		SC
Number of Connector Connections		2	4	4
Fusion Splice	Single Fiber (0.25 mm)	-		4 (single fiber separation required)
	4 Fibers Ribbon	-		4
Dimensions		W 76 x H 165 x D 26 mm		
Mounting Hole Position		H30 2 holes – Ø4.5 mm		
Applicable Cable	Input	2 mm side drop (1 pc), round cable Ø10 mm or less		
	Output	Adapter output		
Weight		Approx. 0.1 kg		

*1 Built-in 4FO fiber
*2 FAST-SC included

Connection Type

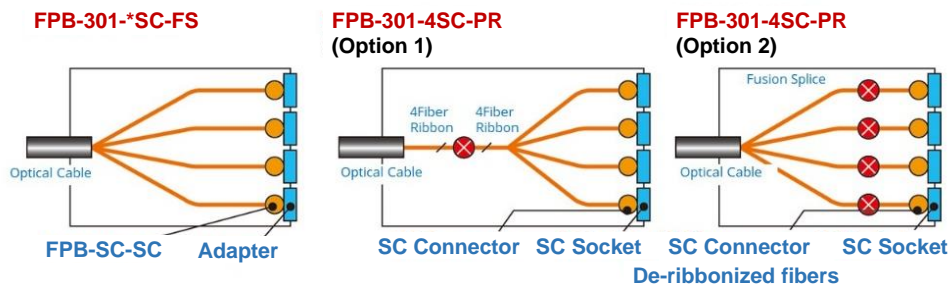

Contact us