

## Mass Fusion Splicer 41R Kit


The 41R is designed for high mobility and includes a wireless communication function, "Active Blade Management Technology", where the splicer is connected to and monitors the fiber cleaver and ribbon fiber stripper.

This functionality greatly prevents operators from making a bad splice due to a worn-out blade position. In addition, both the heating temperature and heating time of the ribbon fiber stripper are automatically changed according to the splice mode setting.



## Features


### Active Fusion Control Technology




## ACTIVE FUSION CONTROL TECHNOLOGY

#### 1. Active Fusion control by fiber count


The 41R automatically determines the number of optical fibers from a single to maximum of 4 fiber ribbon. It minimizes splice loss by performing fusion splicing according to the number of fibers.



Single fiber




4 fiber ribbon

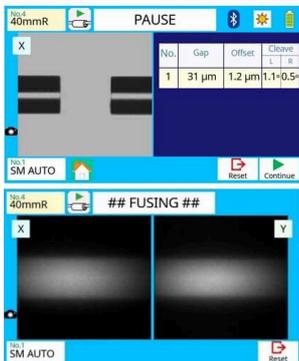


Automatic fusion control by fiber count

#### 2. Active Fusion control in real-time

The 41R features real-time fusion power control by analyzing the fiber's brightness intensity during splicing. Therefore, it can splice the fiber using appropriate fusion parameters. The 41R does not have active core alignment mechanisms, however, during fusion, fiber surface tension effects minimize preexisting offsets.

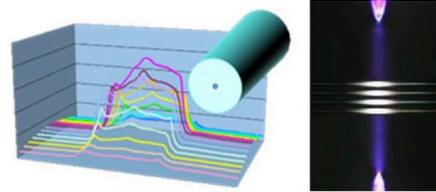

Analyzing Brightness Intensity

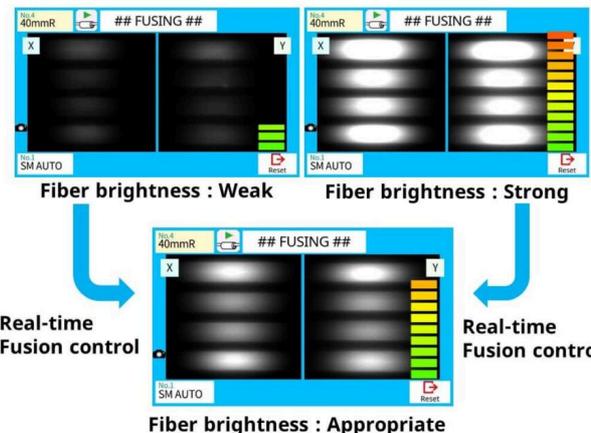


Real-time Fusion control

Real-time Fusion control

Fiber brightness : Appropriate

# Active Blade Management Technology



## ACTIVE BLADE MANAGEMENT TECHNOLOGY


### 1. Active Blade rotation by motor

The 41R fusion splicer and CT50 fiber cleaver are enabled with wireless data connectivity. This capability allows automatic cleaver blade rotation when the splicer judges the blade is worn.



### 2. Active Blade life management


The 41R fusion splicer displays the remaining blade life and informs the user when a blade height change, position change, or new blade is required.

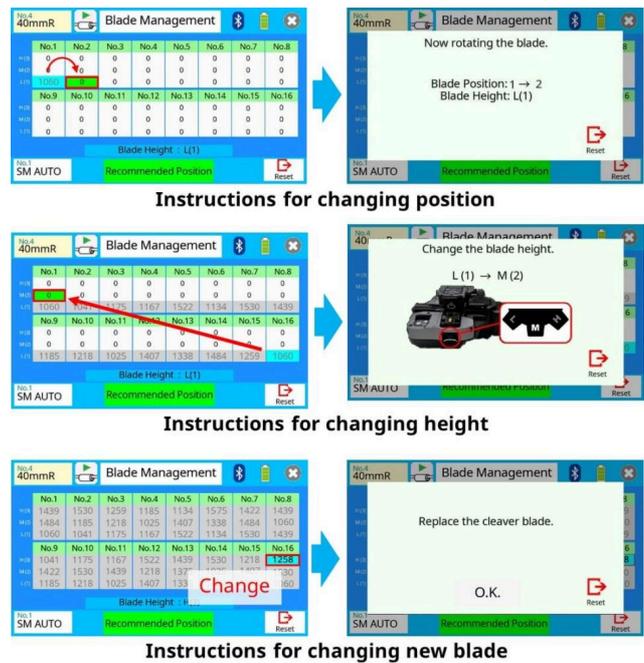

## Well-developed operability


### 1. Simple sleeve centering

The 41R mass fusion splicer features simple sleeve positioning with its designated centering area on top of the tube heater.

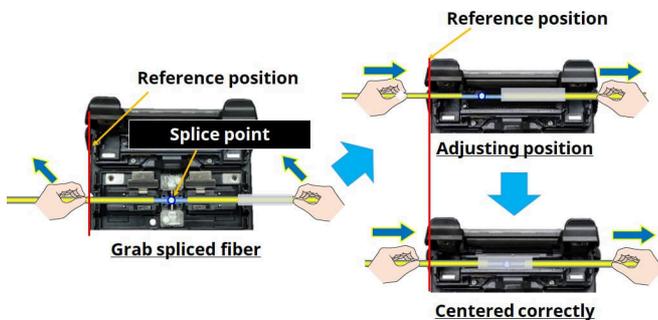

### 2. Universal Tube Heater

The 41R mass fusion splicer can accommodate a max 6.0mm (before shrinking) diameter protection sleeve. As a result, it supports a wide range of protection sleeve sizes.

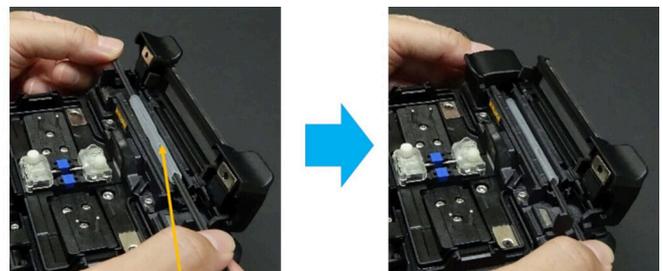


Max. 6.0mm diameter before shrinking

### 3. Easy replacement of consumable parts

#### 3-1 Tool-less Electrode replacement

The 41R electrode comes as an assembly including the fixing screw. The screw can be tightened by hand without tools, enabling easy electrode replacement.

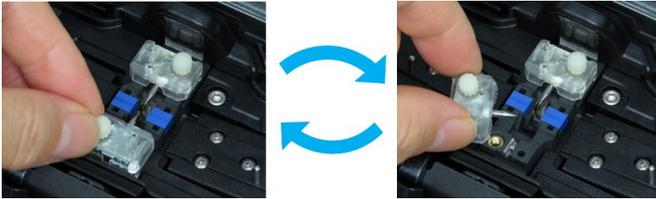

Electrode replacement without tools

#### 3-2 Easy Maintenance

The CT50 fiber cleaver has a user replaceable blade and rubber clamps – there's no need to send the device to a service center for blade or clamp replacement.



Replaceable rubber clamps

Replaceable cleaver blade

#### 4. Carrying Case

There are multiple ways to utilize the 41R carrying case. The 41R is ready to use just by opening the case, but it is also possible to place the tray on top of the carrying case or only with the work tray depending on the work environment.



#### 5. Work Tray

The tray incorporates a drawer which can be slid open to provide more work-space. A locking mechanism is also provided which secures the alcohol pot in place.

# Standard Package

| Item                  |                         | Model                      | Qty    |
|-----------------------|-------------------------|----------------------------|--------|
| Mass Fusion Splicer   |                         | 41R                        | 1pc    |
| 1                     | Battery Pack            | BTR-11A                    | 1 pc   |
| 2                     | AC Adapter              | ADC-19A                    | 1 pc   |
| 3                     | AC Power Cord           | ACC-08, 09, 10, 11 or 12   | 1 pc   |
| 4                     | USB Cable               | USB-01                     | 1 pc   |
| 5                     | Electrodes, for spare   | ELCT2-16B                  | 1 pair |
| 6                     | V-groove Cleaning Brush | VCB-01                     | 1 pc   |
| 7                     | Carrying Case           | CC-36                      | 1 pc   |
| 8                     | Work tray               | WT-08                      | 1 pc   |
| 9                     | Tripod Screw            | TS-03                      | 1 pc   |
| 10                    | Carrying Case Strap     | ST-03                      | 1 pc   |
| 11                    | Alcohol Dispenser       | AP-02                      | 1 pc   |
| 12                    | Quick Reference Guide   | QRG-04-E                   | 1 pc   |
| 13                    | Instruction Manual      | PDF file stored in Splicer |        |
| Single Fiber Stripper |                         | SS03                       | 1pc    |
| Ribbon Fiber Stripper |                         | RS03                       | 1pc    |
| 1                     | Battery Pack            | BTR-12A                    | 1pc    |
| 2                     | AC Adapter              | ADC-09A                    | 1pc    |
| 3                     | AC Power Cord           | ACC-08                     | 1pc    |
| 4                     | Blade Cleaning Brush    | BRS-02                     | 1pc    |
| 5                     | Hexagonal Wrench        | HEX-01                     | 1pc    |
| Optical Fiber Cleaver |                         | CT50                       | 1pc    |
| 1                     | Fiber Scrap Collector   | FDB-05                     | 1pc    |
| 2                     | Fiber Setting Plate     | AD-10-M24                  | 1pc    |
| 3                     | Case, for cleaver       | CC-37                      | 1pc    |
| 4                     | Hexagonal Wrench        | HEX-01                     | 1pc    |



## Specifications

| Item                             |                     | Specification  |
|----------------------------------|---------------------|--|
| Fiber alignment method           |                     | Self cladding alignment with surface melting tension                       |
| Fiber count can be spliced       |                     | Single and up to 4 fiber ribbon  |
| Applicable fiber                 | Fiber type          | Single mode optical fiber<br>Multi mode optical fiber                      |
|                                  | Cladding dia.       | Approx.125µm   |
| Applicable coating               | Fiber holder        | Coating shape.: Refer to options<br>Cleave length : Approx. 10mm           |
|                                  |                     |  |
| Fiber splice performance         | Splice loss (*1)    | ITU-T G.652 : Avg. 0.05dB  |
|                                  |                     | ITU-T G.651 : Avg. 0.02dB  |
|                                  |                     | ITU-T G.653 : Avg. 0.08dB  |
|                                  |                     | ITU-T G.655 : Avg. 0.08dB  |
|                                  |                     | ITU-T G.657 : Avg. 0.05dB  |
|                                  | Splice time (*2)    | SM FAST mode : Avg. 10 to 12sec.   |
| SM AUTO mode : Avg. 15 to 18sec. |                     |  |
| Applicable protection sleeve     | Sleeve type         | Heat shrinkable sleeve   |
|                                  | Sleeve length       | Max. 66mm  |
|                                  | Sleeve dia.         | Max. 6.0mm before shrinking  |
| Sleeve heat performance          | Heat time (*3)      | 40mm FP-04T mode : Avg. 29 to 30sec.                                       |
|                                  |                     | Single 60mm mode: Avg. 25 to 27sec.  |
| Fiber tensile test force         |                     | Approx. 2.0N   |
| Electrode life (*4)              |                     | Approx. 2000 splices   |
| Physical description             | Dimensions W        | Approx.131mm without projection  |
|                                  | Dimensions D        | Approx.201mm without projection  |
|                                  | Dimensions H        | Approx.79mm without projection   |
|                                  | Weight              | Approx. 1.2kg including battery  |
| Environmental condition          | Temperature         | Operate : -10 to 50°C<br>Storage : -40 to 80°C                             |
|                                  | Humidity            | Operate : 0 to 95%RH non-condensing<br>Storage : 0 to 95%RH non-condensing |
|                                  | Altitude            | Max. 3700m   |
| AC adaptor                       | Input               | AC100 to 240V, 50/60Hz, Max. 1.5A  |
| Battery pack                     | Type                | Rechargeable Lithium Ion   |
|                                  | Output              | Approx. DC14.4V, 3190mAh   |
|                                  | Capacity (*5)       | Approx. 140 splice and heat cycles   |
|                                  | Temperature         | Recharge : 0 to 40°C<br>Long Term Storage : -20 to 30°C                    |
|                                  | Battery life (*6)   | Approx. 500 recharge cycles  |
| Display                          | LCD monitor         | TFT 4.9 inches with touch screen   |
|                                  | Magnification       | Approx. 44 to 66X  |
| illumination                     | V-grooves           | LED lamp   |
| Interface                        | PC                  | USB2.0 Mini B type   |
|                                  | External LED lamp   | USB2.0 A type<br>Approx. DC5V, 500mA                                       |
|                                  | Wireless (*7)       | Bluetooth4.1 LE  |
| Data storage                     | Splice mode         | 100 splice modes   |
|                                  | Heat mode           | 30 heat modes  |
|                                  | Splice result       | 10000 splices  |
|                                  | Splice image        | 100 images   |
| Screw hole for tripod            |                     | 1/4-20UNC  |
| Other features                   | Automatic functions | Splice mode select by fiber count analysis                                 |
|                                  |                     | Fusion power calibration   |
|                                  | Reference guide     | PDF file stored in splicer   |
|                                  | Electrode           | Replaceable without tool   |

## Options

| Item              | Model       | Remark                               |
|-------------------|-------------|--------------------------------------|
| Fiber holder      | FH-70-200   | 200µm coating diameter               |
|                   | FH-70-250   | 250µm coating diameter               |
|                   | FH-70-900   | 900µm coating diameter               |
|                   | FH-70-2     | 2 fiber ribbon                       |
|                   | FH-70-4     | 4 fiber ribbon                       |
|                   | FH-70-8     | 900µm in 2mm diameter cable          |
|                   | FH-FC-20    | 900µm in 3mm diameter cable          |
|                   | FH-FC-30    | 900µm loose buffer cable             |
|                   | FH-60-LT900 | Transferring drop cable on work tray |
| Transfer Clamp    | CLAMP-DC-12 | 40mm, up to 8 fiber ribbon           |
| Protection sleeve | FP-04(T)    | 200µm coating diameter               |

### Notes

- \*1. Measured with a cut-back method after splicing the same type of fibers.
- \*2. Measured at room temperature. The definition of splice time is from the fiber image appeared in LCD monitor to the estimated loss displayed. The average splice time changes depending on the environmental conditions, fiber type, and fiber characteristics.
- \*3. Measured at room temperature with the AC adaptor. The heat time is defined from the start beep sound to the finish beep sound. The average heat time changes depending on the environmental conditions, sleeve type and battery pack condition.
- \*4. The electrode life changes depending on the environmental conditions, fiber type and splice modes.
- \*5. Test condition
  - (1) Splice and heat time: 2 minutes cycle
  - (2) Using the splicer power save settings, subject to our testing condition.
  - (3) Using a not degraded battery
  - (4) At room temperature
  - (5) Without accessories ,RS03 etc., that use the power supply of the fusion splicer
- \*6. The battery capacity decreases to a half after approx. 500 discharge and recharge cycles, the battery life is shortened further when using outside of the storage temperature range, operating temperature range, if completely discharged by storing for a long time without recharging.
- \*7. Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc

# Optical Fiber Cleaver CT50



## Specifications

| Item                                   |   | Specification   |
|--|---|---|
| Applicable fiber                       | Fiber type                                | Single mode optical fiber   |
|  |   | Multi mode optical fiber  |
|  | Fiber count                               | Single and up to 16 fiber ribbon  |
|  | Cladding dia.                             | Approx. 125µm   |
| Applicable coating                     | Fiber setting plate                       | AD-10-M24 : Max. 900µm coating diameter   |
|  |   | AD-50 : Max. 3mm coating diameter   |
|  |   | AD-16A : Max. 900µm coating diameter 1 fiber + Max. 250µm coating diameter 1 fiber  |
| Fiber holder                           | Coating shape. : Refer to splicer options |   |
| Cleave length                          | Fiber setting plate                       | AD-10-M24 : 5 to 20mm (*1)  |
|  |   | AD-50 *C.D. : coating diameter<br>C.D. = 250µm or less : 5 to 20mm (*1)<br>250µm < C.D. <=900µm : 10 to 20mm<br>900µm < C.D. <=3mm : 14 to 20mm |
|  |   | AD-16A : 5~20mm (*1)  |
| Fiber holder                           | Approx. 10mm                              |   |
| Cleave angle (*2)                      | Single fiber                              | Avg. 0.3 to 0.9 degrees   |
|  | Fiber ribbon                              | Avg. 0.3 to 1.2 degrees   |
| Blade life (*3)                        |   | Approx. 60000 fiber cleaves   |
| Physical description                   | Dimensions W                              | Approx. 117mm without projection (*4)   |
|  | Dimensions D                              | Approx. 94mm without projection (*4)  |
|  | Dimensions H                              | Approx. 59mm without projection (*4)  |
|  | Weight                                    | Approx. 306g including battery and AD-10-M24  |
| Environmental condition                | Temperature                               | Operate : -10 to 50°C   |
|  |   | Storage : -40 to 80°C   |
| Humidity                               | Operate : 0 to 95%RH non-condensing       |   |
|  | Storage : 0 to 95%RH non-condensing       |   |
| Battery                                |   | 2 pieces of LR03, AAA dry battery   |
| Wireless interface (*5)                |   | Bluetooth 4.1 LE  |
| Screw hole for tripod                  |   | 1/4-20UNC   |
| Holding mechanism for the fiber holder |   | Equipped  |
| Other features                         | Blade rotation                            | Motorized rotation / Manual rotation dial   |
|  | Replaceable parts                         | Blade / Clamp arm   |

## Options

| Item                  | Model       | Remark                                |
|-----------------------|-------------|---------------------------------------|
| Fiber Setting Plate   | AD-50       | Optional fiber setting plate          |
|                       | AD-16A      | Optional fiber setting plate          |
| Blade                 | CB-08       | Blade for replacement                 |
| Clamp Arm             | ARM-CT50-01 | Clamp arm with anvil for replacement  |
| Fiber Scrap Collector | FDB-05      | Spare scrap collector                 |
| Side cover            | SC-CT50-01  | Side cover instead of scrap collector |
| Spacer                | SPA-CT08-10 | Cleave length 10mm                    |
|                       | SPA-CT08-09 | Cleave length 9mm                     |
|                       | SPA-CT08-08 | Cleave length 8mm                     |

### Notes

- \*1. When the cleave length is less than 10mm, the coating diameter should be 250µm or less. Also, a blade height adjustment is required before cleaving. The average cleave angle is worse than the specification when the cleave length is less than 10mm.
- \*2. Measured with an interferometer at room temperature, not with a splicer. A new blade was used to cleave both the single fibers and ribbon fibers. The average cleave angle changes depending on the environmental conditions, blade condition, operating method, and cleanliness.
- \*3. The blade life changes depending on the environmental conditions, operating method, and the fiber type cleaved.
- \*4. Measured in a condition when closing the lever.
- \*5. Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc..

# Ribbon Fiber Stripper RS03



## Specifications

| Item                    |                                  | Specification                         |
|-------------------------|----------------------------------|---------------------------------------|
| Applicable fiber        | Fiber type                       | Single mode optical fiber             |
|                         |                                  | Multi mode optical fiber              |
|                         | Fiber count                      | Single and up to 16 fiber ribbon      |
|                         | Cladding dia.                    | Approx. 125 $\mu$ m                   |
|                         | Coating dia.                     | 200 to 400 $\mu$ m                    |
| Stripping length        |                                  | Max. 35mm                             |
| Heat time (*1)          |                                  | Approx. 3sec                          |
|                         |                                  | Approx. 5sec with Eco-mode            |
| Heat temperature        |                                  | 85 to 140 °C                          |
| Physical description    | Dimensions W                     | Approx. 156mm without projection      |
|                         | Dimensions D                     | Approx. 49mm without projection       |
|                         | Dimensions H                     | Approx. 37mm without projection       |
|                         | Weight                           | Approx. 265g including battery        |
| Environmental condition | Temperature                      | Operate : -10 to 50 °C                |
|                         |                                  | Storage : -40 to 80 °C                |
|                         | Humidity                         | Operate : 0 to 95%RH non-condensing   |
|                         |                                  | Storage : 0 to 95%RH non-condensing   |
| AC adaptor              | Input                            | AC100 to 240V, 50/60Hz, Max. 0.58A    |
| DC input                |                                  | DC10 to 17V, Approx. 1A               |
| Battery pack            | Type                             | Rechargeable Lithium Ion              |
|                         | Output                           | Approx. DC7.2V, 1840mAh               |
|                         | Capacity (*2)                    | Approx. 600 times with Eco-mode       |
|                         | Temperature                      | Operate : -10 to 50 °C                |
|                         |                                  | Recharge : 0 to 40 °C                 |
| Battery life (*3)       | Long Term Storage : -20 to 30 °C |                                       |
| Wireless interface (*4) |                                  | Bluetooth 4.1 LE                      |
| Other features          | Stripping force                  | Lower stripping force design          |
|                         | Automatic heat setting           | Controlled from splicer or smartphone |

## Options

| Item          | Model       | Remark                           |
|---------------|-------------|----------------------------------|
| Spacer        | SPA-RS02-08 | Coating length 8mm               |
| DC power cord | DCC-11      | Splicer to ribbon fiber stripper |

### Notes

- \*1. Measured at room temperature. The heat time changes depending on the environmental conditions and fiber coating type.
- \*2. Tested at room temperature with a not degraded battery and Eco-mode. The number of cycles changes depending on the environmental conditions, stripper settings and battery degrading condition.
- \*3. The battery capacity decreases to a half after approx. 500 discharge and recharge cycles. The battery life is shortened further when using outside of the storage temperature range, operating temperature range, if completely discharged by storing for a long time without recharging.
- \*4. Bluetooth® mark and logos are the registered trademarks of Bluetooth SIG, Inc..



Contact us

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan  
 ©2024-2026, Fujikura Ltd. All rights reserved. 2026 91330-2407-0108-10 2603  
 Specifications are subject to change without notice.