One-Click[™] Cleaner MT-RJ Instruction Manual

Thank you for choosing the One-ClickTM Cleaner MT-RJ. The One-ClickTM Cleaner MT-RJ is a high-performance device designed for cleaning the ferrule end faces of MT-RJ connectors. Please carefully read this instruction manual before using this device. Please keep this instruction manual for future reference.

1. Safety precautions



Though our device is deemed safe, improper usage or handling can still inflict injury to others.

One-ClickTM Cleaner MT-RJ is designed to clean MT-RJ connectors only. Fujikura is not liable for damage caused in attempt to apply this device to other applications.

Available

Not available

2. Notes on usage

Do not attempt to disassemble as this can cause damage to the device and void warranty. Do not use this cleaner when the cloth is empty, as this can cause damage to the connector. Do not use this for an adapter without the ribs.

Do not re-use cleaning cloth as this will eliminate its cleaning ability.

Do not touch the cleaning cloth as this will cause contamination.

Do not pull the cleaning cloth, use only the device body.

Please keep it away from items that are sensitive to magnetism.

3. Notes on storage for extended periods


Do not expose device to direct sunlight, high

temperature or high humidity. The cover on the guide cap should be closed at all times when device is not in use. 4. Sales enquiries With ribs Without ribs

Fiber Optics Components & System Div. Fujikura Ltd 1-5-1 Kiba, Koto-ku, Tokyo 135-8512, JAPAN

TEL: +81-3-5606-1205 FAX: +81-3-5606-1535 E-mail: telcon@fujikura.co.jp

Device construction

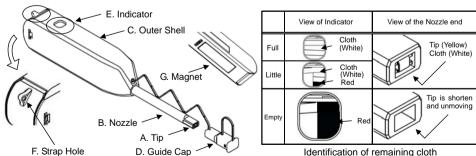


No.	Part Name	Function
Α	Tip	Lead the cleaning cloth to the optical connecter end face.
В	Nozzle	Lead tip to the optical connecter end face.
С	Outer Shell	Push the outer shell to clean the connector.
D	Guide Cap	Acts as dust cap or cleaning adapter for connector plug.
Е	Indicator	Provides indication of remaining cleaning cloth.
F	Strap Hole	Can pass the strings through the strap hole.
G	Magnet	Can stick the iron plate, etc.


6. Applications

<Connector inside adaptor>


<Connector plugs alone>



2. Insert tip of cleaner into MT-RJ Adaptor.



3. Push the Outer Shell to start cleaning the MT-RJ connector end face. An audible "click" sound indicates end of cleaning process. Close the cover after use.




Be careful not to slant the One-Click[™] Cleaner MT-RJ while inserting into the adapter.

Do not overly exert force during insertion as this may cause damage to both the connector and the One-Click[™] Cleaner MT-RJ.


If pushing Outer Shell is inhibited, remove One-ClickTM Cleaner MT-RJ and verify there is no sizeable debris is inhibiting the cleaning process.

1. Open the Cover on the Guide Cap.

2. Insert MT-RJ connector into the Guide Cap.



3. Push the Outer Shell to initiate the cleaning the MT-RJ connector end face. An audible "click" sound indicates end of cleaning process. Close the cover after use.



Be careful not to slant connector while inserting into the Guide cap.

Do not overly exert force during insertion as this may cause damage to both the connector and the One-Click[™] Cleaner MT-RJ.

If pushing Outer Shell is inhibited, remove One-ClickTM Cleaner MT-RJ and verify there is no sizeable debris is inhibiting the cleaning process.

Copyright © 2011 Fujikura.Ltd, All rights reserved.