


Mechanical Splice

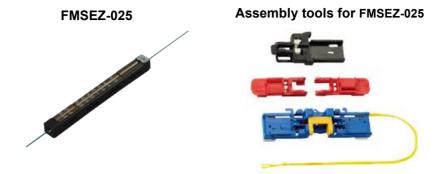

The Mechanical Splice enables efficient field splicing without the need for a fusion splicer.

Features

- Mechanical Splice for Ø 0.25 mm Fiber Connection.
- Includes 1 set of assembly tools for every 50 mechanical splice sets.

Specifications

	FMSEZ-025
Size	40 x 4 x 4 (mm)
Insertion Loss	Average 0.1 dB, Maximum 0.4 dB
Reflection Loss	≥ 40 dB
Required tools	Fujikura's Cleaver and etc (Assembly tools is attached in product)
Applicable Fiber	Ø 0.25 mm fiber
Applicable Temperature Range	-40−75 °C

