

### Optical Closures for Aerial Drop Connecting Case



The design of the FSCO-V3 closure facilitates seamless connections between drop cables, enhancing efficiency in various applications.

These applications encompass the restoration of disconnected drop cables and their relocation to other utility poles, ensuring flexibility and ease of use.

#### Features

- Easy opening/closing

#### Application


- Aerial or wall mounted, Outdoor



SC Connector Connection



Fusion Connection

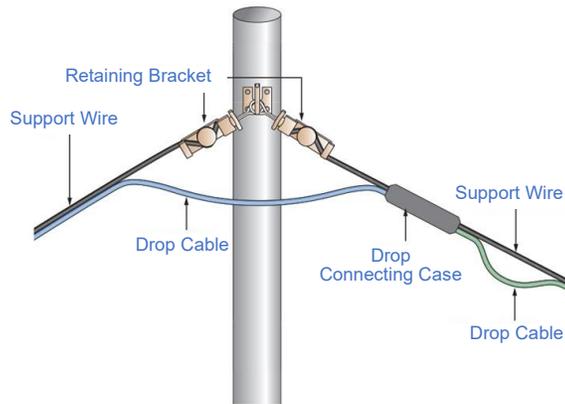

#### Physical & Mechanical Characteristics

		FSCO-DRP
Applicable Cable Type		Figure-8 drop cable, Squire type drop/indoor cable
Cable Capacity / Applicable Cable Dia.	Figure-8 Drop Cable	1 set (2 pcs) / Approx. 2 x 5.3 mm
	Squire Type Outdoor or Indoor Cable	1 set (2 pcs) / Approx. 2 x 1.6 mm or 3.1 x 2 mm
Applicable Connection Type		Fusion splicing, SC Connector (*1) or Mechanical splice
IP Rating		IPX4 (*2)
Dimension (in approx.)		W 24 x H 33 x L 176 mm
Weight (in approx.)		0.1 kg

(\*1) SC adapter is applied unflanged type

(\*2) JIS C 0920



Contact us